

BLUE STAR

Power Systems Inc.

Diesel Product Line

208-600 Volt

VD400-01

60 Hz / 1800 RPM

400 kWe / 360 kWe

Standby / Prime

Ratings

	208V	240V	480V	600V
Phase	3	3	3	3
PF	0.8	0.8	0.8	0.8
Hz	60	60	60	60
Generator Model	433CSL6220	433CSL6220	433CSL6220	433PSL6248
Connection	12 LEAD WYE	12 LEAD DELTA	12 LEAD WYE	4 LEAD WYE
Standby				
kWe	400	400	400	400
AMPS	1390	1204	602	482
Temp Rise	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C
Prime [Only Available For Mobile Applications]				
kWe	360	360	360	360
AMPS	1251	1084	542	434
Temp Rise	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C

Standard Equipment

Engine

- ▶ Radiator Cooled Unit Mounted (55°C)
- ▶ Blower Fan & Fan Drive
- ▶ Starter & Alternator
- ▶ Oil Pump & Filter
- ▶ Oil Drain Extension w/Valve
- ▶ Governor - Electronic Isochronous
- ▶ 24V Battery System & Cables
- ▶ Air Cleaner (Dry Single Stage)
- ▶ Flexible Fuel Connector
- ▶ EPA Certified Tier 3

Listing Certifications

- ▶ UL 2200 Listed
- ▶ cUL Listed
- ▶ CSA Certified
- ▶ Seismic Certified to IBC 2012

Generator

- ▶ Brushless Single Bearing
- ▶ Automatic Voltage Regulator
- ▶ ± 1% Voltage Regulation
- ▶ 4 Pole, Rotating Field
- ▶ 130°C Standby Temperature Rise
- ▶ 105°C Prime Temperature Rise
- ▶ 100% of Rated Load - One Step
- ▶ 5% Maximum Harmonic Content
- ▶ NEMA MG 1, IEEE and ANSI Standards Compliance for Temperature Rise

Additional

- ▶ Microprocessor Based Digital Control
- ▶ Interface Connection Box
- ▶ Control Panel Mounted in NEMA 12 Enclosure
- ▶ Base - Formed Steel
- ▶ Main Line Circuit Breaker Mounted & Wired
- ▶ Critical Grade Silencer Mounted
- ▶ Battery Charger 24V 5 Amp
- ▶ Jacket Water Heater -20°F 4000W 240V w/Isolation Valves
- ▶ Vibration Isolation Mounts
- ▶ Radiator Duct Flange (OPU Only)
- ▶ Single Source Supplier
- ▶ 2YR / 2000HR Standby Warranty
- ▶ 1YR / 1500HR Prime Warranty
- ▶ Standard Colors - White / Tan / Gray

Diesel Product Line

400 kWe / 360 kWe



Application Data

Engine				
Manufacturer:		Volvo Penta	Displacement - Cu. In. (lit):	780 (12.8)
Model:		TAD1353GE	Bore - in. (cm) x Stroke - in. (cm):	5.20 (13.1) x 6.20 (15.8)
Type:		4-Cycle	Compression Ratio:	18.1:1
Aspiration:		Turbo Charged, CAC	Rated RPM:	1800
Cylinder Arrangement:		6 Cylinder Inline	Max HP Stby (kWm):	611 (449)
Exhaust System			Standby	Prime
Gas Temp. (Stack): °F (°C)			932 (500)	905 (485)
Gas Volume at Stack Temp: CFM (m³/min)			2,790 (79.0)	2,613 (74.0)
Maximum Allowable Exhaust Restriction: in. H₂O (kPa)			40.0 (10.0)	40.0 (10.0)
Cooling System				
Ambient Capacity of Radiator: °F (°C)			131 (55.0)	131 (55.0)
Maximum Allowable Static Pressure on Rad. Exhaust: in. H₂O (kPa)			0.50 (0.12)	0.50 (0.12)
Water Pump Flow Rate: GPM (lit/min)			87.0 (329)	87.0 (329)
Heat Rejection to Coolant: BTUM (kW)			10,123 (177)	9383 (164)
Heat Rejection to CAC: BTUM (kW)			5,346 (94.0)	5,289 (93.0)
Heat Radiated to Ambient: BTUM (kW)			3,415 (59.8)	3,202 (56.0)
Air Requirements				
Aspirating: CFM (m³/min)			1,102 (31.2)	1,038 (29.4)
Air Flow Required for Rad. Cooled Unit: CFM (m³/min)			24,175 (684)	24,175 (684)
Air Flow Required for Heat Exchanger/Rem. Rad. CFM (m³/min)			Consult Factory For Remote Cooled Applications	
Fuel Consumption				
At 100% of Power Rating: gal/hr (lit/hr)			27.9 (105.6)	25.6 (96.9)
At 75% of Power Rating: gal/hr (lit/hr)			21.9 (82.9)	20.1 (76.1)
At 50% of Power Rating: gal/hr (lit/hr)			15.0 (56.8)	14.0 (53.0)
Fluids Capacity				
Total Oil System: gal (lit)			9.50 (36.0)	9.50 (36.0)
Engine Jacket Water Capacity: gal (lit)			5.28 (20.0)	5.28 (20.0)
System Coolant Capacity: gal (lit)			11.6 (44.0)	11.6 (44.0)


Deration Factors

Rated Power is available up to 3,280 Ft (1,000 m) at ambient temperatures to 122°F (50°C) standby and prime.
Consult factory for site conditions above these parameters.

DGC-2020 Control Panel

Standard Features



- ▶ Digital Metering
- ▶ Engine Parameters
- ▶ Generator Protection Functions
- ▶ Engine Protection
- ▶ CAN Bus ECU Communications
- ▶ Windows-Based Software
- ▶ Multilingual Capability
- ▶ Remote Communications to RDP-110 Remote Annunciator
- ▶ 16 Programmable Contact Inputs
- ▶ Up to 15 Contact Outputs (7 standard)
- ▶ UL Recognized, CSA Certified, CE Approved
- ▶ Event Recording
- ▶ IP 54 Front Panel Rating with Integrated Gasket
- ▶ NFPA 110 Level 1 Compatible

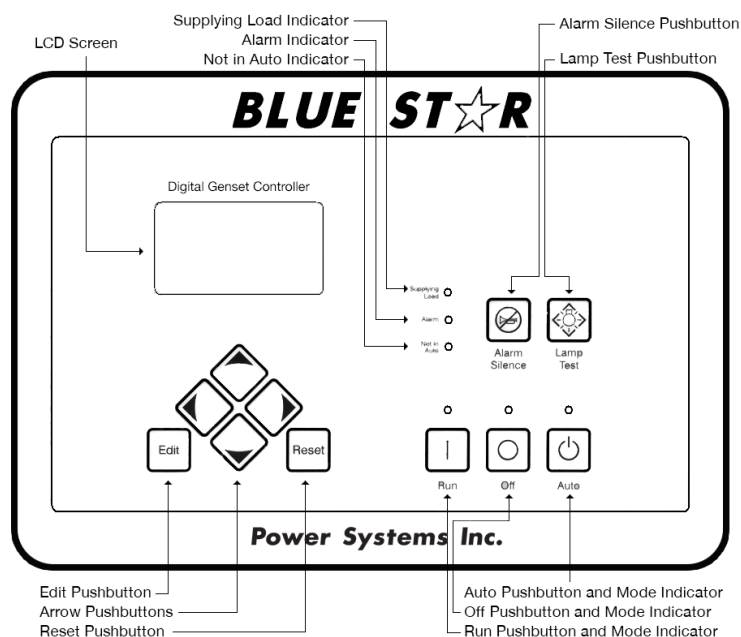



Weights / Dimensions / Sound Data

	L x W x H	Weight lbs
OPU	120 x 66 x 83 in	7,875
Level 1	156 x 66 x 94 in	9,125
Level 2	156 x 66 x 94 in	9,200
Level 3	204 x 66 x 94 in	9,500

Please allow 6-12 inches for height of exhaust stack.

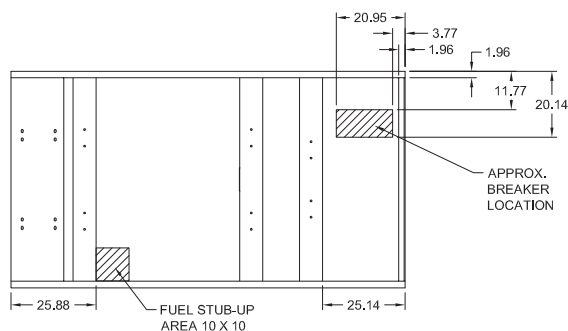


	No Load	Full Load
OPU	88 dBA	91 dBA
Level 1	84 dBA	86 dBA
Level 2	79 dBA	81 dBA
Level 3	70 dBA	73 dBA

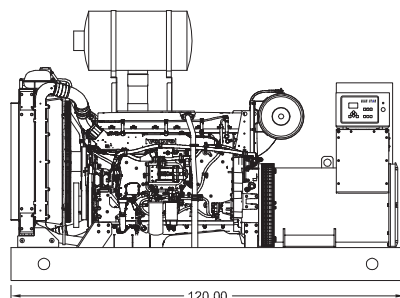


Drawings based on standard open power 480 volt standby generator. Lengths may vary with other voltages. Subject to change without notice.
Sound data as measured at 23 feet (7 meters) in accordance with ISO 8528-10 at standby rating.

Enclosures

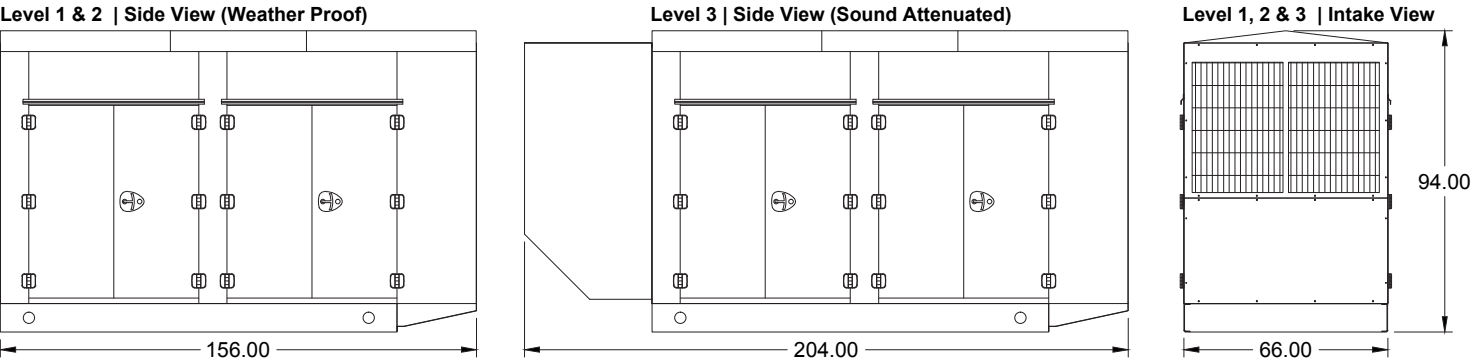

All enclosures are 150 MPH Wind Rated.
Level 2 & 3 enclosures include sound attenuation foam.
Level 3 enclosure includes frontal sound & exhaust hood.
*Enclosure height does not include exhaust stack.

Double Wall UL 142 Listed Fuel Tanks

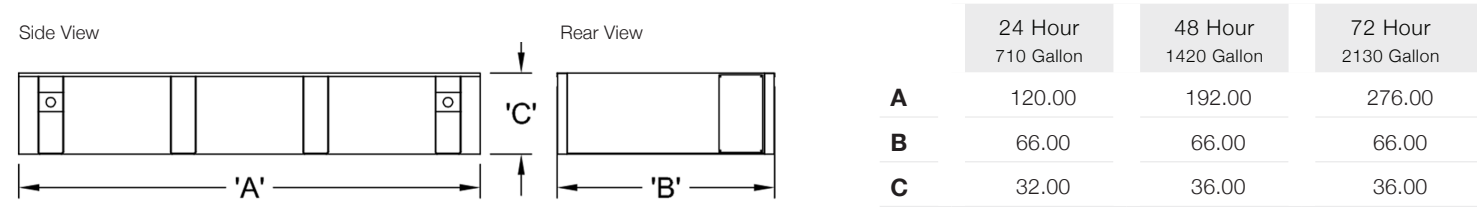

All specification sheet dimensions are represented in inches.
All enclosures and fuel tanks are based on the standard standby unit configuration. Any deviation can change dimensions.
Materials and specifications subject to change without notice.



Distributed By:

Blue Star Power Systems, Inc.
52146 Ember Road
Lake Crystal, Minnesota 56055
Phone + 1 507 726 2508
bluestarps.com
quote.bluestarps.com
sales@bluestarps.com